ARGIL
GROUP

LINK LOCK
Revolution in tiles

SPC FLOORING

ARGIL SPC Flooring Co.
(O): 8-A, National highway, Morbi - 363642 | Gujarat | India.
(M): info@argiltiles.com | spcflooring@argiltiles.com
(w): www.argilgroup.com | (M): +91 99255 11465

PLEASE DOWNLOAD OUR OFFICIAL
APPLICATION FOR ANDROID & IOS

ANDROID IOS

GO-R GRAPHICS - +91 98250 44570

ARGIL
GROUP

LINK LOCK
Revolution in tiles

SPC FLOORING

228X1524mm | 181X1220mm
306X612mm

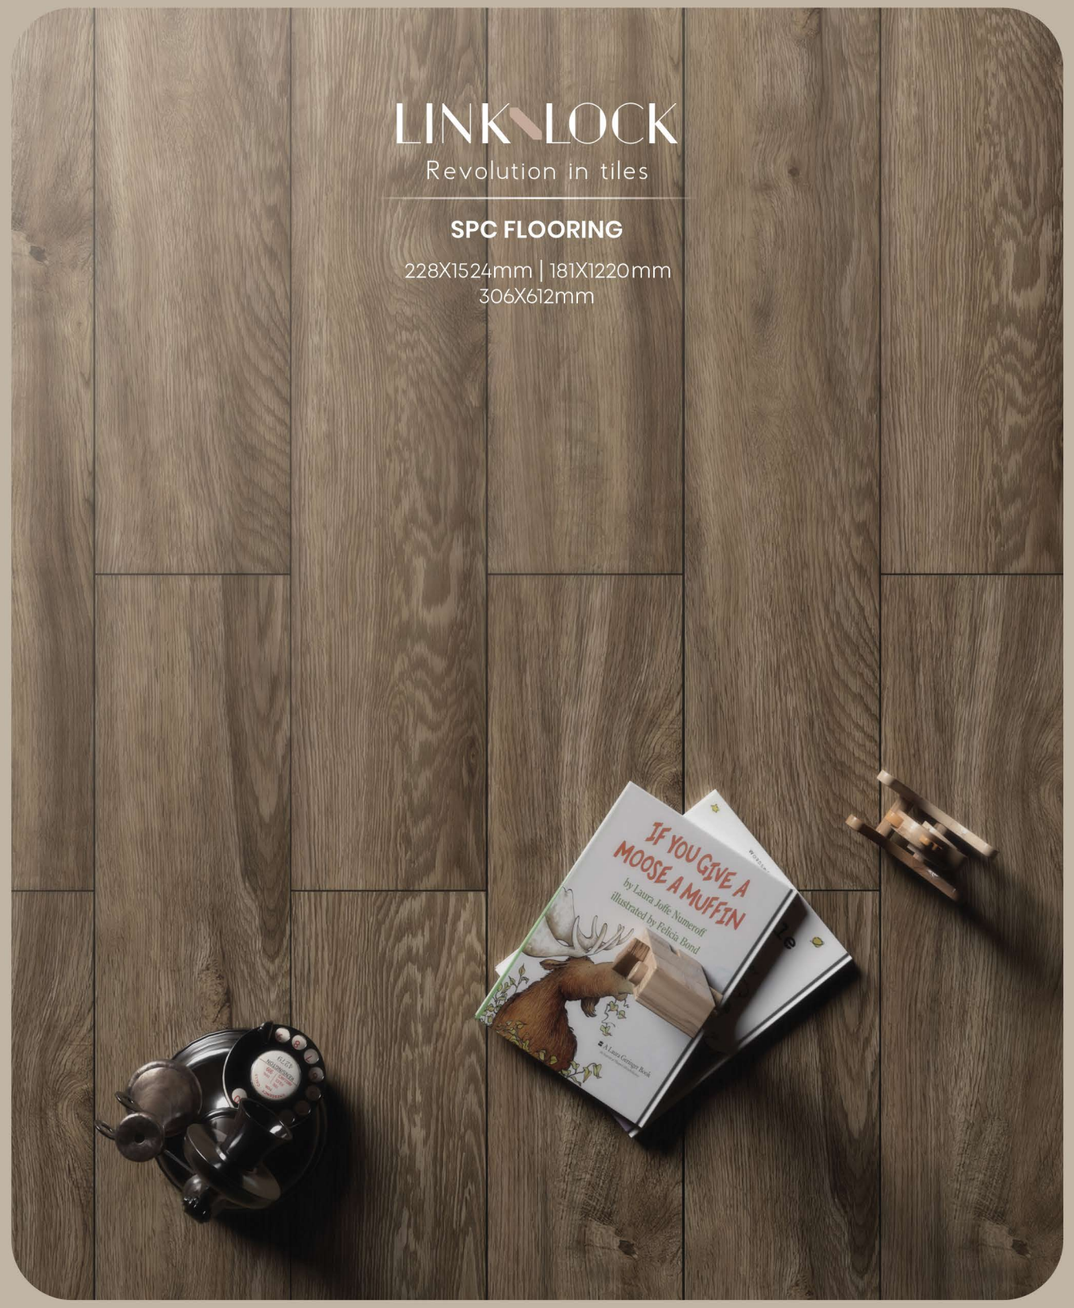

Catalogue 2026

ARGIL GROUP

Crafting the Future of Floors, Backed by Seven Decades of Excellence

With a legacy that spans over 70 years from humble beginnings to a globally recognized group of companies, Argil has consistently set benchmarks in design, durability,and innovation. Today, we proudly introduce our latest state-of-the-art manufacturing unit, dedicated exclusively to SPC (Stone Polymer Composite) Flooring Tiles — a revolutionary stride into the future of surface solutions.

Our Legacy, Reinvented

At Argil,tradition and technology walk hand-in-hand. Our SPC Flooring division is a natural evolution — combining our deep-rooted craftsmanship with forefront engineering to meet the needs of modern architecture and sustainable design.

What Sets Us Apart

Next-Gen Manufacturing Unit

Equipped with the latest cosmopolitan machinery, our facility operates with precision automation and sustainable energy systems, ensuring consistency, efficiency, and minimal environmental impact.

Innovative Core Technology

Our SPC tiles are engineered with a multi-layered core structure, offering superior stability, 100% waterproofing, and resistance to wear, impact, and temperature changes.

Global Standards, Local Precision

Designed to exceed international standards, every tile from our SPC line is a testament to Argil's global quality benchmarks — trusted in over 60 countries and counting.

Design-Driven

From minimalist tones to bold textures, our SPC range reflects the latest in global design trends. Whether for homes, commercial spaces, or industrial projects, we offer solutions that inspire and endure.

Sustainability at the Core

Built with eco-friendly materials and low-emission processes, Argil SPC tiles are as kind to the planet as they are to the eye.

Vision for the Future

Argil's SPC Flooring Unit is a manifesto of innovation. As global lifestyles evolve, so do our products. Our commitment remains clear: To deliver surfaces that inspire confidence, comfort, and creativity across the globe.

Argil SPC Flooring – Engineered to Endure, Designed to Impress

LINK LOCK

Revolution in tiles

SPC FLOORING



Laying Of "link Lock" Is Made Precise And Simple, Moreover Link N Lock Is An Innovation To Become More Dynamic And Versatile Than Ever. These Enviro- Friendly Tiles Are Noise Proof, Dust Free And Also Scratch And Stain Resistant. As Also Being Water Proof And Anti-slip They Are Perfect Selection For Kitchen And Bathroom. "link N Lock" Is Designed As Identical Appeal Of Traditional Flooring Materials Such As Stone, Wood, Concrete, Fabric. It Provides Flexibility Prints Offering A Wide Variety Of Design Concepts.

"Link Lock" flooring is specially designed technology with inter locking seamless joints system. It can easily be installed with designed pattented technology from UNILIN, on different floor base. Cleaned floor can be concrete, ceramic or other existing flooring.

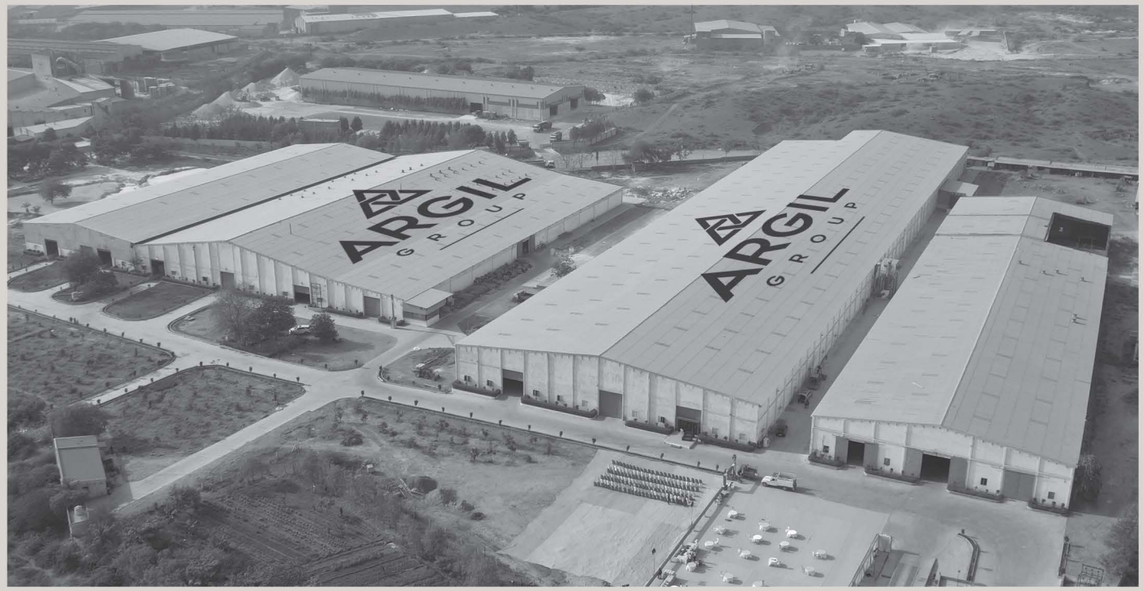

LINK LOCK
Revolution in tiles

SPC FLOORING

“LINK LOCK” - SPC Flooring, what does it stands for ?

SPC flooring stands for **Stone Plastic Composite**. It describes the ultra-tough core of luxury SPC flooring. Popular for being 100% waterproof with extreme durability, these engineered luxury SPC planks with a cutting edge design, mimic natural wood and stone textures at minimal effort. LINK LOCK- SPC's base is virtually imperishable, making it an absolute choice for high-traffic and commercial environments.

EASE CLEAN

Appreciate the cleanliness

In Link n Lock tiles, material offers an innovative solution with a cutting edge design giving most demanding settings with high resistance to stains, abrasion and UV rays. That gives both functionality and durability.

UV Layer
Wear layer
Design Layer
SPC Core
Underlayment (IXPE)

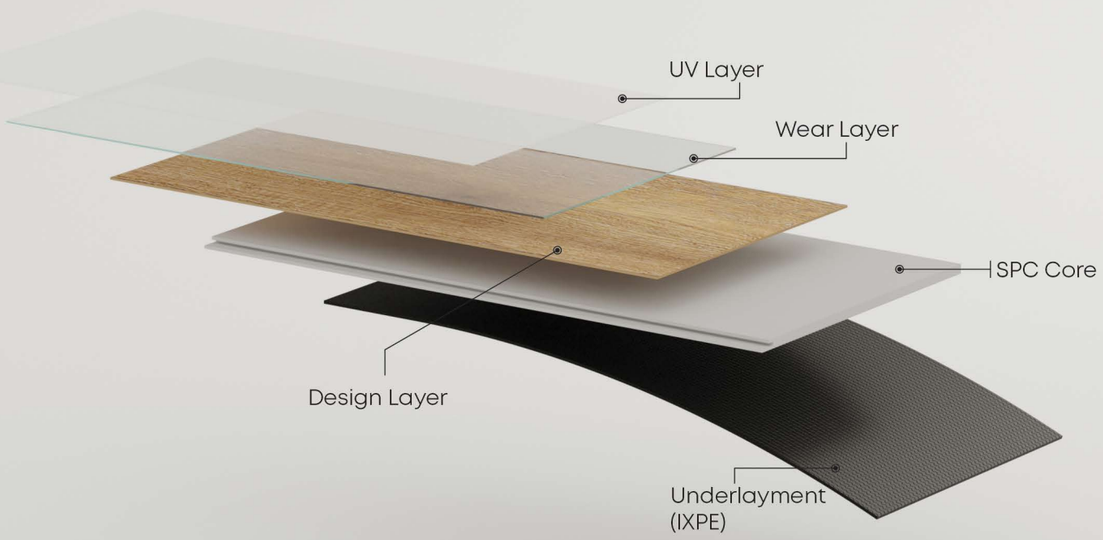

SPC FLOORING

What Is The Role Of Spc In Flooring Actually ?

Link n Lock SPC flooring, is the most durable waterproof flooring in the market. SPC flooring is crowd-pleasing for being flexible and less bulky than traditional wood, well its just like standing on real solid marterial. It is thinest flooring, may seem like it doesn’t inside to it, but it is the toughest of the tough, specially designed to resist the use of commercial outskirts.

FEATURES

Quick Installation
Light Weight
Easy To Clean
Green Product
Flame Resistant
Scratch Resistant
Weather Proof
Stain free
Parasite free
Water Proof
Recyclable
Hassle Free Logistics
Easy to Carry
Mix & Match

SPC COLOUR

White
Ebony
Honey
Ash
Golden
Wenge
Brown
Coco
Grey
Carbon
Black

APPLICATION

Office
Clinic
Living Room
Kitchen
Bedroom
Retail Shops
Restaurant
Cafes

LINK LOCK

Revolution in tiles

SPC FLOORING

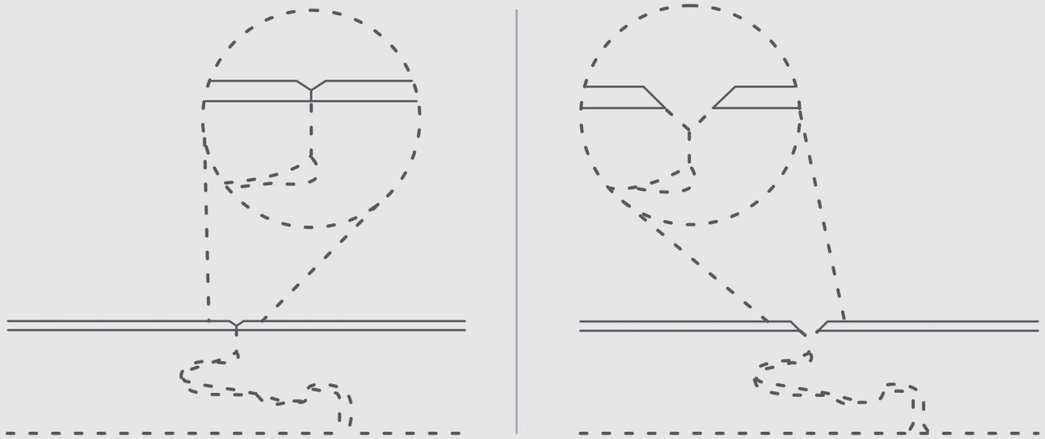

Micro Bevel

Painted Bevel

Enhance The Look, Feel The Groove

The term "**bevel edge**" refers to the v-shaped groove that the Sides and ends of each plank are cut and how they appear once the panels Are engaged together. The bevel edge serves to highlight the flooring's design And decor intentions. It is worth noting that all kinds of flooring, including spc, Come with some form of beveled edge.

Bevels can really change the look and feel of flooring products. Throughout the years, the bevel has **evolved in different stages** together with the **market trends** and technical possibilities. The choice of the bevel type can give floors a more natural look, close to real wood products, and can elevate a floor to the next level of authenticity.

ARGIL's LINK N LOCK SPC flooring products have 2 different types of beveled edges.

- Micro Bevel: A micro bevel is a very small bevel which creates a distinction between each plank.
- Painted Bevel: A painted bevel has a thin strip of paint applied to the beveled edges of the plank, creating a subtle shadow line and a more realistic look.



INDEX


1101
WALDEN OAK
ASH


1102
FUMED OAK
WENGE


1103
PEDY OAK
GOLDEN


1104
HIGHLAND GREY
VEINS


1105
HIGHLAND
BLACK VEINS


1106
TUDOR OAK
RUSTIC GREY


1107
CAMPUS GOLDEN
BROWN


1108
CANYON
OAK ASH


1109
CANYON OAK
CHERRY RED


1110
FOSTER HONEY


1111
DENALI OAK
EBONY


1112
DENALI OAK
MAHOGANY


1113
ARTICIAN OAK
VINTAGE


1114
NEW CASTLE
HONEY


1115
NEW CASTLE
VINTAGE


1116
CREEK OAK
WHITE


1117
CREEK OAK
GREY


1118
VERTICAL OAK
BLACK


1119
MILANO
WENGE


1120
MILANO
GREY


1121
VERTICAL OAK
EBONY


1122
LILY OAK
EBONY


1123
LILY OAK
WENGE


1124
LILY OAK
BROWN


1125
BOSTON OAK
EBONY


1126
BOSTON OAK
WHITE


1127
VINTAGE OAK
EXPRESSO


1128
TREND PARKETT
DARK GREY


1129
ANTIQUE MAPEL
GOLDEN


1131
TREND PARKETT
BROWN


1132
CANYON OAK
BROWN


1133
DENALI OAK
ORANGE


1134
ALBINIA GOLDEN


1135
ANDRIA GREY


1136
CANYON OAK
CHERRY BROWN


1138
BLYTHE


1139
BELLAMY
BROOKS


1140
DARIA UMBER


1141
BRIAR HAVEN


1142
CANTON OAK ASH

1143
BRUCE OAK
BROWN

1144
ZURICH FOG
GREY

1145
ANCIENT OAK
IVORY

1146
ACADIA RUSSET
BROWN

2101
KATI OAK
CARBON

2102
KATI OAK COCO

2103
KATI OAK EBONY

2104
KATI OAK GREY

2105
ALPEN OAK
WENGE

2106
ALPEN OAK
ASH

2107
ALPEN OAK
DARK GREY

2108
GLOBAL OAK
ASH

2109
GLOBAL OAL
EBONY

2110
GLOBAL OAK
BROWN

2111
GLOBAL OAK
COCO

2112
GLOBAL OAK
WENGE

2113
GLOBAL OAK
WHITE

2114
ANTIQUE MAPLE
HONEY

2115
ITALIAN WALNUT
EBONY

2116
ITALIAN WALNUT
WENGE

1147
WILTON

1148
VINTAJ

1149
TURKISH
WALNUT

1150
VERTICAL
CANOPY OAK

1151
NORDIC MIST
OAK

3101
ARMANI
BROWN

3102
ARMANI GREY

3103
CALACATTA
CLASSIC



HARMONY OF NEW DESIGN

LINK LOCK
Revolution in tiles

SPC FLOORING



1101
WALDEN OAK ASH



1102
FUMED OAK WENGE



1103
PEDY OAK GOLDEN

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



ROYAL GRANDEUR FOREVER ENDURE

LINK LOCK
Revolution in tiles

SPC FLOORING



1104
HIGHLAND GREY VEINS



1105
HIGHLAND BLACK VEINS



1106
TUDOR OAK RUSTIC GREY

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



NATURAL CHARM
MODERN STRENGTH

LINK LOCK
Revolution in tiles

SPC FLOORING



1107
CAMPUS GOLDEN BROWN



1108
CANYON OAK ASH



1109
CANYON OAK CHERRY RED

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



WOODEN FEEL
WORRY FREE LIVING

LINK LOCK
Revolution in tiles

SPC FLOORING



1110
FOSTER HONEY



1111
DENALI OAK EBONY



1112
DENALI OAK MAHOGANY

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



LUXURY THAT LASTS A LIFETIME

LINK LOCK
Revolution in tiles

SPC FLOORING



1113
ARTICIAN OAK VINTAGE



1114
NEW CASTLE HONEY



1115
NEW CASTLE VINTAGE

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



CRAFTED FOR BEAUTY BUILT FOR LIFE

LINK LOCK
Revolution in tiles

SPC FLOORING



1116
CREEK OAK WHITE



1117
CREEK OAK GREY



1118
VERTICAL OAK BLACK

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



YOUR FLOOR
YOUR STATEMENT

LINK LOCK
Revolution in tiles

SPC FLOORING



1119
MILANO WENGE



1120
MILANO GREY



1121
VERTICAL OAK EBONY

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



STYLE IS A CHOICE MAKE YOUR

LINK LOCK
Revolution in tiles

SPC FLOORING



1122
LILY OAK EBONY



1123
LILY OAK WENGE



1124
LILY OAK BROWN

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



BEAUTY THAT NEVER FADES

LINK LOCK
Revolution in tiles

SPC FLOORING



1125
BOSTON OAK EBONY



1126
BOSTON OAK WHITE



1127
VINTAGE OAK EXPRESSO

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE NATURE OF INNOVATION

LINK LOCK
Revolution in tiles

SPC FLOORING



1128
TREND PARKETT DARK GREY



1129
ANTIQUE MAPEL GOLDEN



1131
TREND PARKETT BROWN

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE DURABLE DEFINITION OF WOOD

LINK LOCK
Revolution in tiles

SPC FLOORING



1132
CANYON OAK BROWN



1133
DENALI OAK ORANGE



1134
ALBINIA GOLDEN

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE BEAUTY OF WOOD

LINK LOCK
Revolution in tiles

SPC FLOORING



1135
ANDRIA GREY



1136
CANYON OAK CHERRY BROWN



1138
BLYTHE

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE STRENGTH OF WOOD

LINK LOCK
Revolution in tiles

SPC FLOORING



1139
BELLAMY BROOKS



1140
DARIA UMBER



1141
BRIAR HAVEN

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE NATURE OF INNOVATION

LINK LOCK
Revolution in tiles

SPC FLOORING



1142
CANTON OAK ASH



1143
BRUCE OAK BROWN



1144
ZURICH FOG GREY

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



WOOD THE SOUL OF MODERN LIVING

LINK LOCK
Revolution in tiles

SPC FLOORING



1145
ANCIENT OAK IVORY



1146
ACADIA RUSSET BROWN



2101
KATI OAK CARBON

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE ART OF WOOD, PERFECTED.

LINK LOCK
Revolution in tiles

SPC FLOORING



2102
KATI OAK COCO



2103
KATI OAK EBONY



2104
KATI OAK GREY

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



OUR FOUNDATION FOR A BEAUTIFUL LIFE.

LINK LOCK
Revolution in tiles

SPC FLOORING



2105
ALPEN OAK WENGE



2106
ALPEN OAK ASH



2107
ALPEN OAK DARK GREY

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



DESIGN A LIFE IN PERFECT HARMONY.

LINK LOCK
Revolution in tiles

SPC FLOORING



2108
GLOBAL OAK ASH



2109
GLOBAL OAL EBONY



2110
GLOBAL OAK BROWN

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



AUTHENTIC WOOD HARMONIOUS DESIGN

LINK LOCK
Revolution in tiles

SPC FLOORING



2111
GLOBAL OAK COCO



2112
GLOBAL OAK WENGE



2113
GLOBAL OAK WHITE

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE ITALIAN EXPRESSION OF WOOD.

LINK LOCK
Revolution in tiles

SPC FLOORING



2114
ANTIQUE MAPLE HONEY



2115
ITALIAN WALNUT EBONY



2116
ITALIAN WALNUT WENGE

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE ITALIAN EXPRESSION OF WOOD.

LINK LOCK
Revolution in tiles

SPC FLOORING



1147
WILTON



1148
VINTAJ



1149
TURKISH WALNUT

PRODUCT DESCRIPTION

Wear layer option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge profile:	Micro Bevel Edge & Painted Bevel Edges
Installation method:	Uniclic



THE ITALIAN EXPRESSION OF WOOD.

LINK LOCK
Revolution in tiles

SPC FLOORING



1150
VERTICAL CANOPY OAK



1151
NORDIC MIST OAK

PRODUCT DESCRIPTION

Wear Layer Option:	0.3 & 0.5 mm
Size:	181 X 1220 mm | 228x1524mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge Profile:	Micro Bevel Edge & Painted Bevel Edges
Installation Method:	Uniclic



THE ITALIAN EXPRESSION OF WOOD.

LINK LOCK
Revolution in tiles

SPC FLOORING

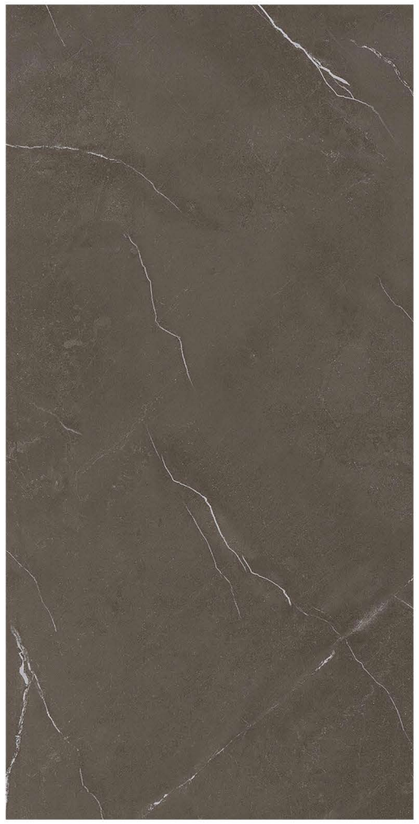

3101
ARMANI BROWN

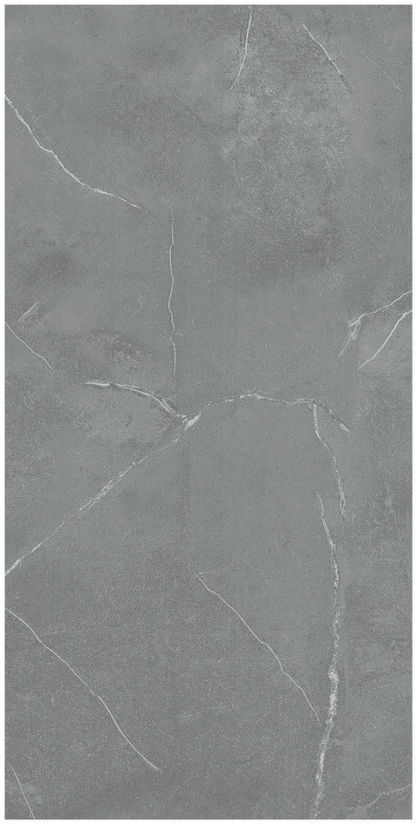

3102
ARMANI GREY

PRODUCT DESCRIPTION

Wear Layer Option:	0.3 & 0.5 mm
Size:	306 X 612 mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge Profile:	Micro Bevel Edge
Installation Method:	Uniclic



THE ITALIAN EXPRESSION OF WOOD.

LINK LOCK
Revolution in tiles

SPC FLOORING



3103
CALACATTA CLASSIC

PRODUCT DESCRIPTION	
Wear Layer Option:	0.3 & 0.5 mm
Size:	306 X 612 mm
Thickness:	5 mm to 7 mm
Ixpe Backing:	1 mm , 1.5 mm , 2 mm
Edge Profile:	Micro Bevel Edge
Installation Method:	Uniclic

Technology Partner

UNILIN TECHNOLOGIES FOR SMART LIVING

Unilin Uniclic stands out for its patented design, offering superior joint strength, flexible installation methods, and brand recognition—making it a trusted choice for premium vinyl flooring.

Many buyers focus on thickness or wear layer, but forget that a poor locking system can cause gapping, shifting, and costly complaints. That's why we always recommend looking deeper—starting with the click.

What Is The Unilin Locking System?

Most vinyl floors look similar—but how the planks lock together is a key technical difference.

Unilin Uniclic is a patented mechanical locking system developed by Unilin in Belgium. It allows vinyl planks to be joined by angling or tapping, without glue or nails. Uniclic is considered one of the most reliable vinyl click systems on the market for joint integrity, ease of installation, and long-term performance.

Why it matters?

Uniclic isn't just a design—it's a technology protected by global patents. It uses tongue and-groove joints with micro-angle engineering that delivers consistent interlocking strength. For large-scale buyers, this flexibility helps reduce labor costs and lower error rates. In my factory tests, the average install time using Uniclic is 18–22% faster than traditional glue-down or cheaper click systems.

Feature	Unilin Click (Uniclic)	Generic Click System
Locking Method	Angle-Angle / Angle-Tap	Angle Only
Patent Protection	Yes	Usually None
Joint Strength (N/m)	450–500	300–350
Avg. Install Speed (sqm/day)	80–120	60–90
Reusability	High	Low

SHRI AMARSHIBHAI PRAJAPATI GROUP
PROUD TO BE
70th
EST. 1952
YEARS OF EXCELLENCE