

www.argiltiles.com




ARGIL

LINKLOCK

Revolution in tiles

201 X 1220 MM


181 X 1220 MM

306 X 612 MM



Link to your ideal
space.

SPC 2022

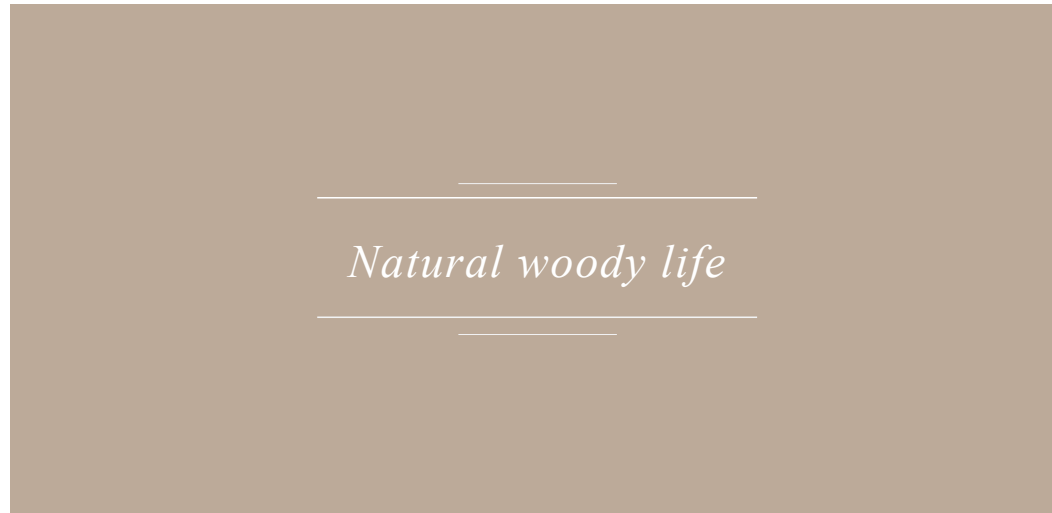

Ideal for every space as it keeps the floor germ-free.






FROM THE CHAIRMEN'S DESK.

Argil is a global ceramic manufacturing company established in 1951, focused on fulfilling its mission of betterment. The ceramic sector has escalated over the years into a fully grown and well established industry. Innovations and manufacturing of tiles have helped global citizen better living.


We invest in environment-responsible practices; from developing renewable products to keeping our infrastructure, resources, machinery and delivery systems streamlined and efficient. Our plants are spread across 35 acres at Morbi in the state of Gujarat; India.



We have over 500 committed employees with Group, looking after various aspects from production to distribution. We're dedicated to running our business in the best way we can, and to make positive impact on global communities.

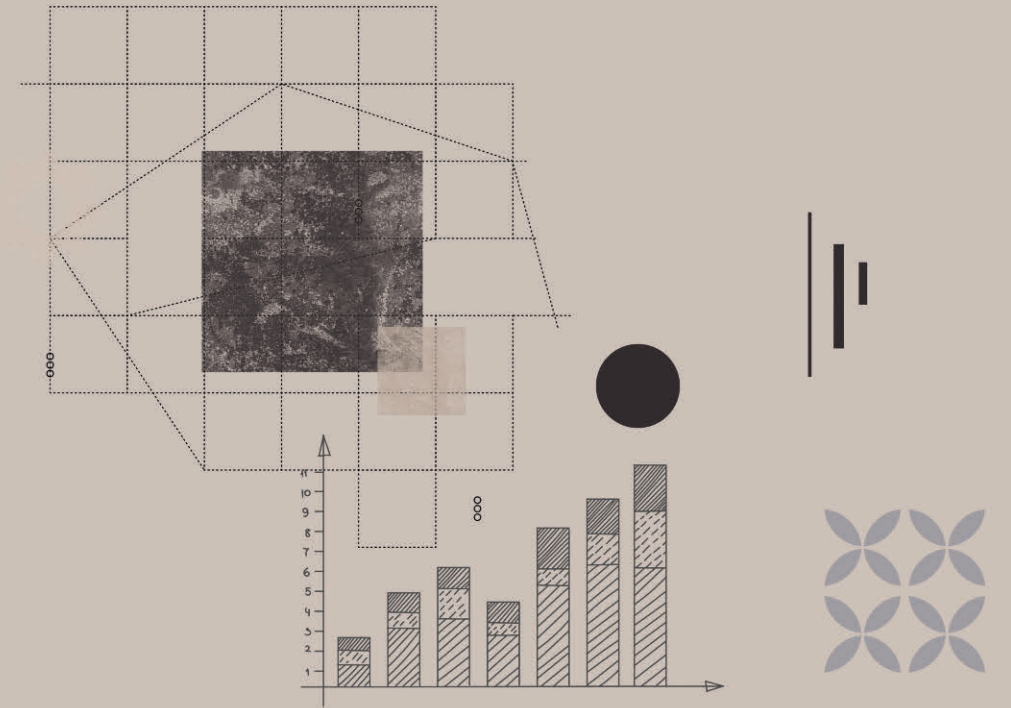

With a kick start of traditional pottery before 70 years, a dynastic family is ready to conquer crafty, creative, functional and dynamic ceramic world. With the same passion, Argil is about to launch its most versatile product SPC Flooring, most dynamic and easy to install wooden flooring. Most suited for commercial purpose, Argil is one of the manufacturer of SPC flooring in India.

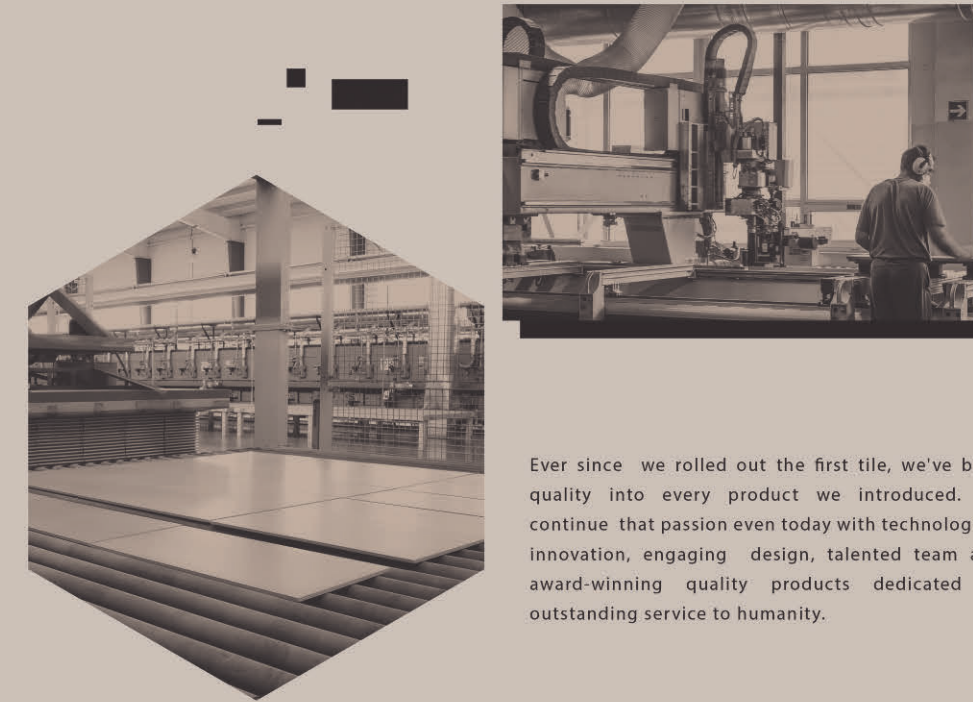

Ever since we rolled out the first tile, we've built quality into every product we introduced. We continue that passion even today with technological innovation, engaging design, talented team and award-winning quality products dedicated to outstanding service to humanity.

We're proud to manufacture ceramic products of tradition grown with contemporary technology and proud to lead the industry as a trusted brand on 'tiles'. We take this leadership role seriously.

Link to your ideal space.



SPC material that simulates natural stone, marble, or natural wood, Ideal for residential and public spaces.

Eco-friendly, resistant and long-lasting flooring.

LINK n LOCK

WHY LINK n LOCK?

"Link n Lock" flooring is specially designed technology with inter locking seamless joints system. It can easily be installed with designed patented technology from **UNILIN**, on different floor base. Cleaned floor can be concrete, ceramic or other existing flooring.

Laying of "Link n Lock" is made precise and simple, Moreover Link n Lock is an innovation to become more dynamic and versatile than ever. These enviro- friendly tiles are noise proof, dust free and also scratch and stain resistant. As also being water proof and anti-slip they are perfect selection for kitchen and bathroom. "Link n Lock" is designed as identical appeal of traditional flooring materials such as Stone, Wood, Concrete, Fabric. It provides flexibility prints offering a wide variety of design concepts.



“LINK LOCK” - SPC flooring,
what does it stands for ?

SPC flooring stands for **Stone Plastic Composite**. It describes the ultra-tough core of luxury SPC flooring. Popular for being 100% waterproof with extreme durability, these engineered luxury SPC planks with a cutting edge design, mimic natural wood and stone textures at minimal effort. LINKLOCK - SPC's base is virtually imperishable, making it an absolute choice for high-traffic and commercial environments.

EASE CLEAN

Appreciate the cleanliness

In Link n Lock tiles, material offers an innovative solution with a cutting edge design giving most demanding settings with high resistance to stains, abrasion and UV rays. That gives both functionality and durability.

Layers of tile are stars by themselves. It is made up of 5 layers which includes:


UV Coating
Wear layer
PVC print layer-Decor film
Rigid SPC core
1mm backing IXPE base

“LINKLOCK” THE MOST DURABLE

SPC FLOORING

A must information for Architects, Builder supervisors and Customers.
Discovering the SPC SURFACE.

“LINK LOCK is one of the most popular materials for interior renovations, as its installation does not require any construction work.”

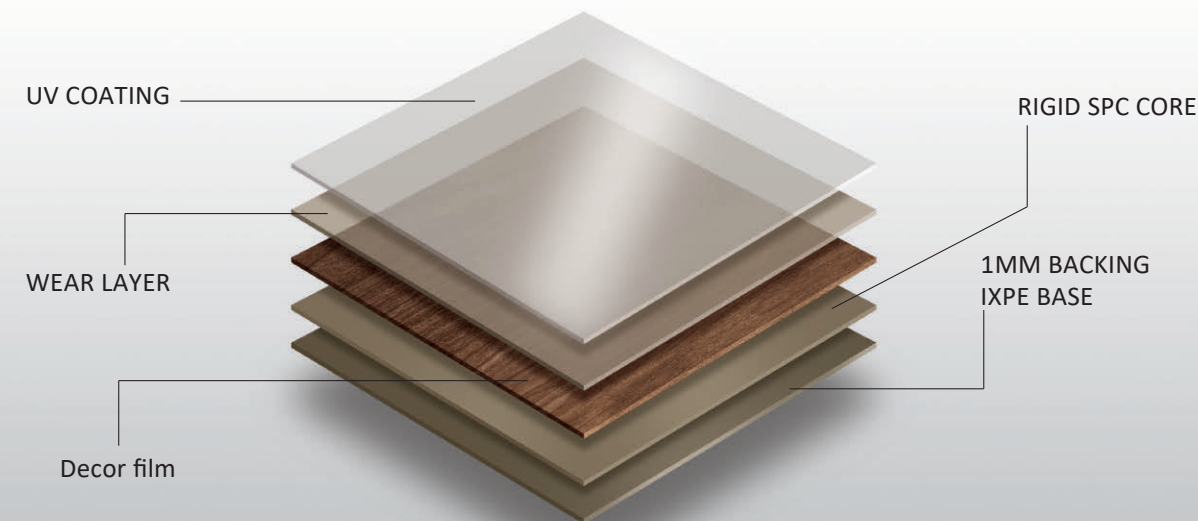

SPC flooring,
what is the role of SPC in flooring actually ?

Link n Lock SPC flooring, is the most durable waterproof flooring in the market. SPC flooring is crowd-pleasing for being flexible and less bulky than traditional wood, well its just like standing on real solid marterial. It is thinnest flooring, may seem like it doesn't inside to it, but it is the toughest of the tough, specially designed to resist the use of commercial outskirts.



Quick Installation



Lower Weight



Easy To Clean



Green Product



Flame Resistant



Scratch Resistant



Weather Proof



Stain free



Peresit free



Water Proof



Recyclable



Hassle Free Logistics



Easy to Carry



Mix & Match





KEY FEATURES:




Realistic wood and stone looks
For Commercial & high-traffic areas
For Bathroom, Kitchen, Basements.

It provides flexibility prints offering a wide variety of design concepts.



No expansion /contraction
same feel from the day one.

One big worry for traditional wood flooring is expansion and contraction causing shifting or buckling in the floor. Rigid core does not expand or contract,even when moisture is present.



Perfect for imperfect subfloors
thanks to technology integrated into the product

This is the other trademark of LINK LOCK SPC vinyl flooring. Engineered to be installed over any existing hard surface, including tile.



Ultra-durable
Zero maintenance

LINK LOCK SPC vinyl flooring is the toughest, most durable vinyl flooring option on the market. All you need is the occasional vacuum and damp mop to keep your floor looking fabulous.



Restaurants, canteens, cafes. Greater hygiene in food space is essential.



Healthcare environments, medical clinics. Sensitive immune system requires the utmost care.



Gyms, health clubs, spas. Antimicrobial surfaces in sports and wellness centres for extreme care.



Airports, shopping centres, schools. Large public areas are difficult to clean, keeping it germs free and smell free.



“LINK LOCK SPC flooring can be installed at any level, over almost any existing (hard surface) subfloor and for any amount of traffic.”

The unique features of SPC flooring



Less than 24 hours installation in a day



Highly Durable




Hasselfree Installation



Noise and Dust free



Healthy Floor




We know pets can completely wreck a floor between accidents, nails and running, SPC is built to handle it. It's also less slippery on those little puppy paw.



Completely fire resistance, Not only is it non-combustible; it also acts as a barrier in the event of a fire.



SPC vinyl floor can withstand the exposure to sunlight, with its original colour and shade remaining unaltered.



It has non-slip properties, combining a natural feel with high-level resistance against slipping.



It's perfect for business owners, pets and water-prone areas. Moisture proof with Zero surface porosity.



High resistance to regular cleaning product. Completely stain resistance.




FORMATS

SIZES AND COLORS
available.


201 X 1220 MM



181 X 1220 MM

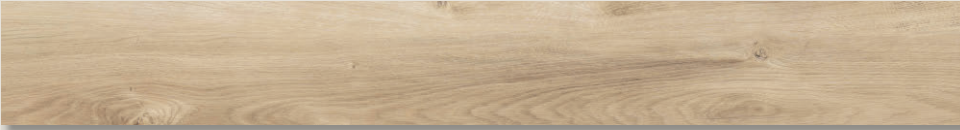


White Ebony Honey Ash Golden Wenge

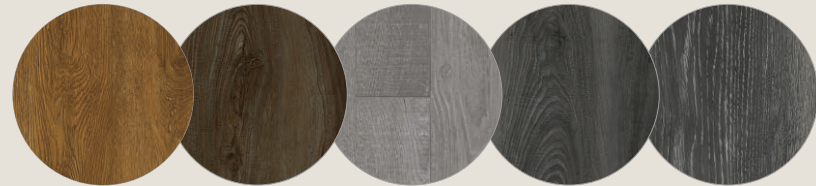

Brown Coco Grey Carbon Black


306 X 612 MM

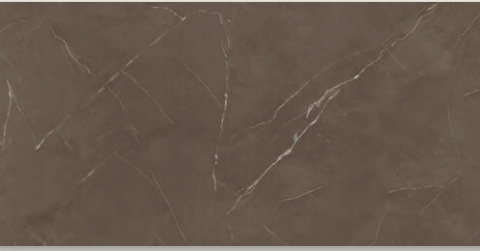

306 X 612 MM



306 X 612 MM

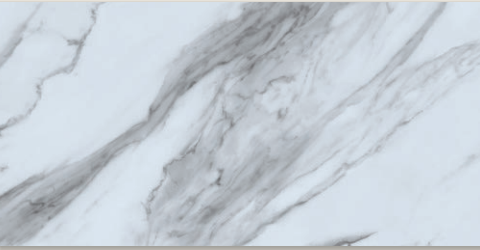

“LINKLOCK” TEXTURE LUXURY

STONE | MARBLE | WOOD.
Natural material looks are usually incredibly convincing and beautiful.
The many inspirations behind the LINK LOCK range can be used to
customise any space and create constantly changing material effects.

STONE
As nature creates.
The stone reveals its true essence. The rigour
of stone is trasformed through creative
research into surface processing techniques.
App: INDOOR.



WOOD
Wood effect focus on elegance and natural
look. The soft veins, the harder once and
natural stensils of wood are designed to ensure
the maximum versatility. This expands the
range of application and sizes that includethe
exclusive SPC planks.
App: INDOOR.

MARBLE
Exotic Marble that stand out for their
sophisticated colors, elegant veins effect
and highly decorative surfaces.
App: INDOOR.



APPLICATION

Indoor application where SPC flooring can be placed:

Residential:

Kitchen | Living room | bedroom:


Commercial:

Retail Shops | Restaurant | Cafes:

Finishes:



Rustic | Matt

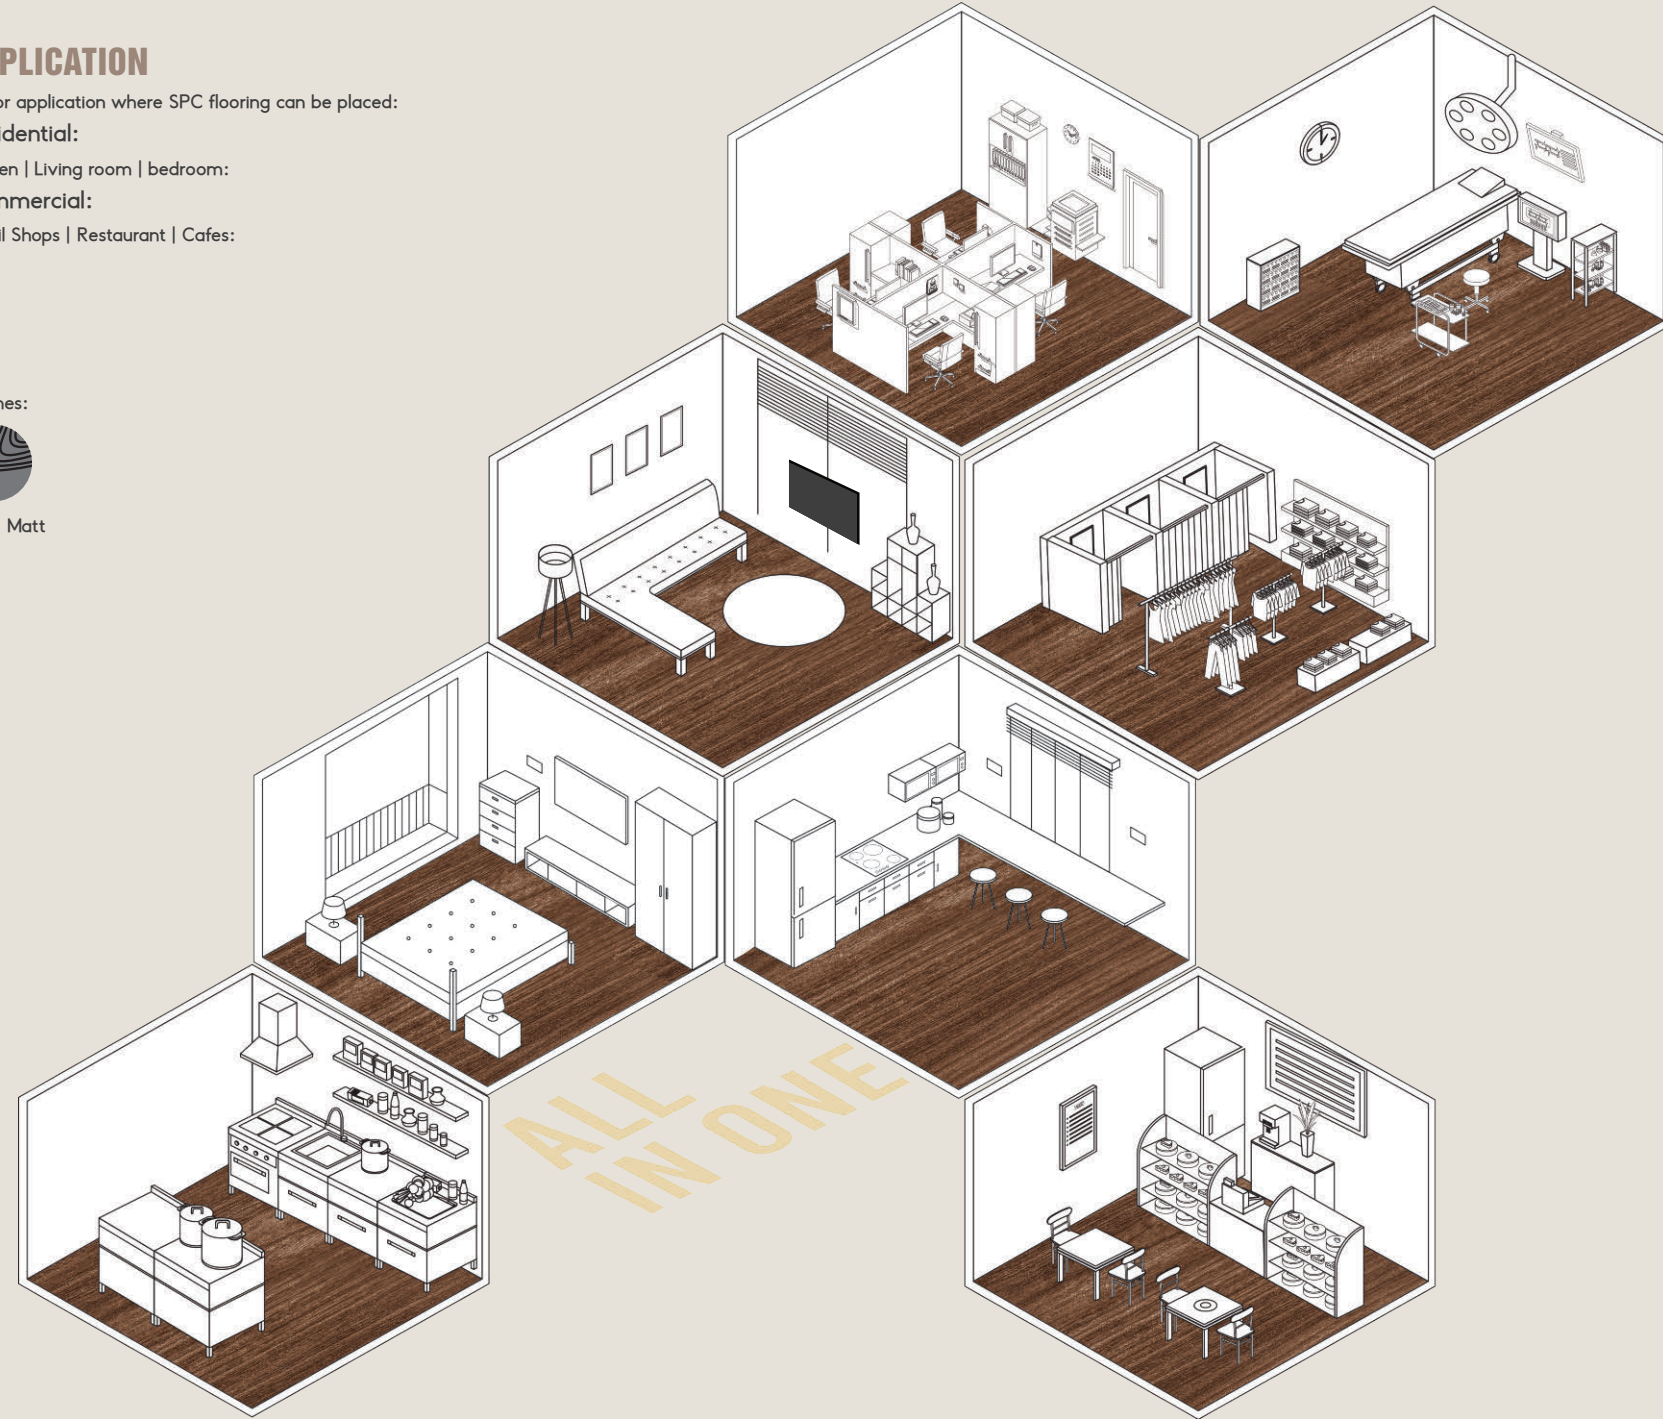

Our environmental commitment starts right from the design stage. The surface’s optimal properties in terms of product durability and minimal maintenance, are combined with a firm commitment to minimising its environmental impact throughout the product life cycle: from manufacturing, transportation and installation, through to end of life.

“LINKLOCK” INDEX
SPC FLOORING

201 X 1220 mm 14	181 X 1220 mm 28	306 X 612 mm 52
		



201 X 1220 MM



WOODS

Eco-friendly, resistant and
long-lasting flooring.





2114_Antique Mapel Honey



A touch of Design

Add rustic charm, or a modern flare by adding SPC floors to your living room. Keep your floor looking as great as the day it was installed. You're looking for an easier to maintain option, but still want the classic look. It is a great long-lasting alternative that looks more realistic and stylish – the Touch of Design. It is incredibly versatile. More durable and you can install it at vivid areas.

201 X 1220



WOODS | 201 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 201 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



2101_Kati Oak Carbon



2102_Kati Oak Coco



WOODS | 201 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 201 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



2103_Kati Oak Ebony



2104_Kati Oak Grey



2114_Antique Mapel Honey



WOODS | 201 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 201 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



2105_Alpen Oak Wenge



2106_Alpen Oak Ash



2107_Alpen Oak Dark Grey



2115_Italian Walnut Ebony



2116_Italian Walnut Wenge



2107_Alpen Oak Grey dark





A touch of Class

Caters sophistication and dynamic taste with touch of articulated version of SPC flooring in vogue. Maximum expression of modernity inevitably blurs boundaries between the inside and outside. The style and class inspire the next architectural surface. Surface can be exploited in the best way. Experience a stark balance between modern design and vintage wisdom.

201 X 1220



WOODS | 201 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 201 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



2108_Global Oak Ash



2109_Global Oak Ebony



2110_Global Oak Brown



WOODS | 201 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 201 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



2111_Global Oak Coco



2112_Global Oak Wenge



2113_Global Oak White

2113 - Global Oak White



181 X 1220 MM



WOODS

Eco-friendly, resistant and
long-lasting flooring.



1103_Pedy Oak Golden



Versatile Essence

For Kitchen Essence, SPC floors are one of the best and trendy options that offer an affordable yet realistic appearance to add to the beauty of the kitchen. SPC are protective to dents, cracking or warping. Kitchen space gains appearance of real wood in particular with unique features of patterns and textures. Seek the majestic, sharp and elegant look with realistic illustration and focused texture. The space comes out beautifully with warmth and character.

181 X 1220



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



1101_walden Oak Ash



1102_Fumed Oak Wenge



1103_Pedy Oak Golden zoom

WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



1103_Pedy Oak Golden



1104_Highland Grey viens



1105_Highland Black viens





1106_Tudor Oak Rustic grey



Warm and cozy

Your bedroom is your own personal retreat from the world, so it should reflect your unique taste and style.

SPC LINKLOCK flooring features a rustic-industrial design that's both chic and charming at the same time. It features a sturdy, a timeless, an elegant look, suitable for any style of home decor. Show off your bolder side with modern and rustic styles. Give your personal space a comfortable and relaxing environment, allowing you to take a long nap comfortably and reliably.

181 X 1220



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



1106_Tudor Oak Rustic grey



1107_Campus Golden Brown



1108_Canyon Oak Ash



1106_Tudor Oak Rustic grey



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



1109_Canyon Oak Cherry red



1110_Foster Honey



1111_Denali Oak Ebony



1112_Denali Oak Mahogany



1113_Artician Oak Vintage





Shades of Color

Small commercial places like saloons, shops, gathering halls require ease of movement, minimal maintenance and quick attraction as key factors. Spaces with Argil wooden planks satisfies them at the highest level. They leave enough scope for decoration with pretty look. Patterns being close to nature suddenly feel relaxed and calm around it. Constraint of limited space gets the best fit of such engineered tiles.

181 X 1220



WOODS | 181 X 1220 MM | SPC flooring


Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.

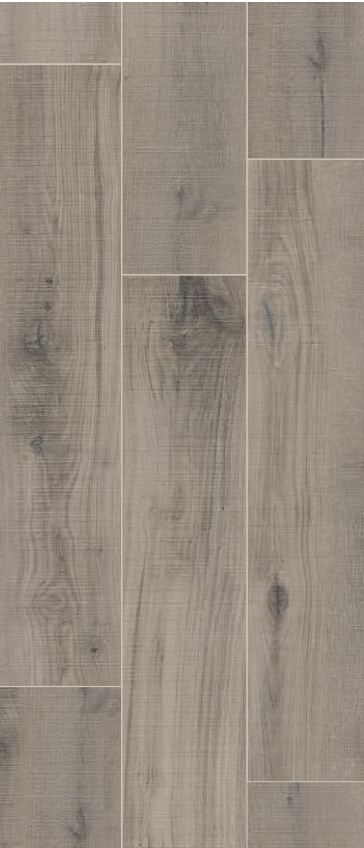

1114_New Castle Honey



1115_New Castle Vintage



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.


Installation method: Uniclic.



1116_Creek Oak White



1117_Creek Oak grey

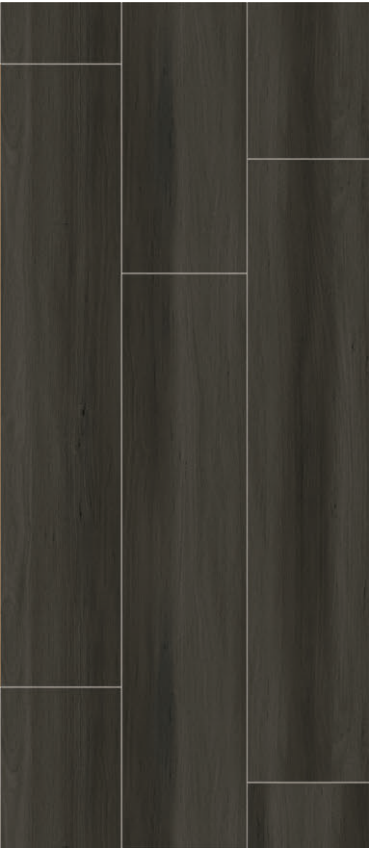

1118_Vertical Oak Black



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



1119_Milano Wenge



1120_Milano Grey



1121_Vertical Oak Blond



1119_Milano Wenge

1122_Lily Oak Ebony



Luxury to the Space

SPC flooring performs to commercial businesses with the ultimate architectural designs that are both aesthetically pleasing, easy to install and simple to maintain. Settle with design one that can handle heavy foot traffic while adopting the overall theme of commercial place or retail store.

It can add an artistic flair to the commercial building. Obtain an elegance and modern sophistication. Long time durability will also create a more traditional or exotic theme. Bring a sense of sophistication and luxury to the space.

181 X 1220



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Size: 181 X 1220 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.

Installation method: Uniclic.



1122_Lily Oak Ebony



1123_Lily Oak Wenge



1124_Lily Oak Brown



1125_Boston Oak Ebony



1126_Boston Oak White

MATT V3 FLOOR

LINK LOCK
Revolution in tiles

1122_Lily Oak Ebony zoom



WOODS | 181 X 1220 MM | SPC flooring

Wear layer option: 0.3 & 0.5 MM

Thickness: 4 MM to 6 MM

Installation method: Uniclic.



1127_Vintage Oak Espresso



1128_Trend Parkett dark Grey



1129_Antique Mapel Golden



1130_Canyon Oak Brown



1131_Trend Parkett Brown

MATT V3 FLOOR

LINKLOCK
Revolution in tiles





3101_Armani Brown

Sense of Naturalness

The high-tech manufacturing amalgamated with high description scanners and advanced 3D digital imaging have brought out realistic illustrations and created the character, texture and feel that one may expect for any appealing Restaurant.

It is astounding to know that they make the place very righteous and realistic to look at. If one seeks ambience and rough textured yet luxurious feel as majestic, sharp and elegant looking flooring can offer - the must choice is LINK LOCK SPC flooring.



Stone & Marble | 306 X 612 MM | SPC flooring


Wear layer option: 0.3 & 0.5 MM

Size: 306 X 612 MM

Thickness: 4 MM to 6 MM

Edge Profile: Micro Bevel Edge & Painted Bevel Edges.


Installation method: Uniclic.

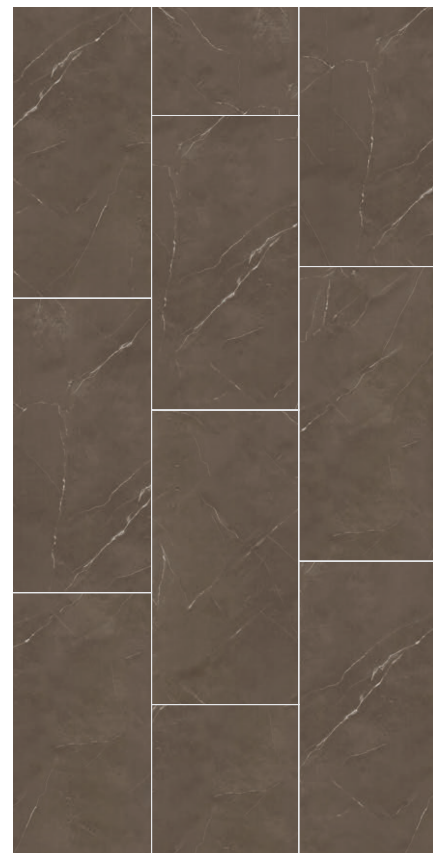

3101_Armani Brown



3102_Armani Grey

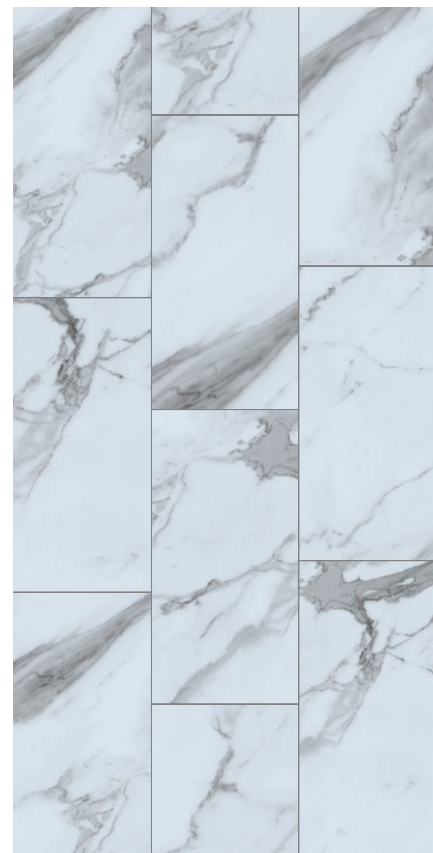




3103_Calacatta Classic





3102_Armani Grey

General

Uniclic is a revolutionary system for installing floors without using glue. The panels can be clicked together simply thanks to the ingenious shape of the tongue and groove. Uniclic is unique because you can install the planks in two different ways:

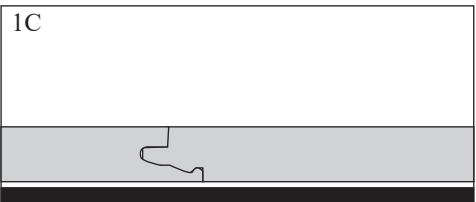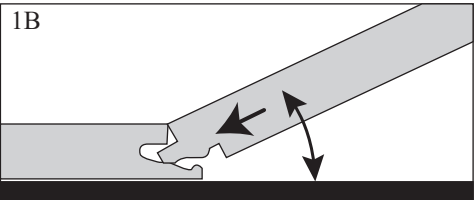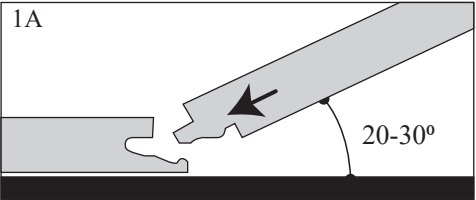

Method A: Position the panel to be installed at an angle of 20 to 30° to the panel already installed. Move the panel gently up and down and at the same time exert forward pressure. The panels will automatically click into place. You can either insert the tongue into the groove, or the groove on to the tongue. The tongue in groove method is the most common and easiest way. See diagram 1A - 1B - 1C.

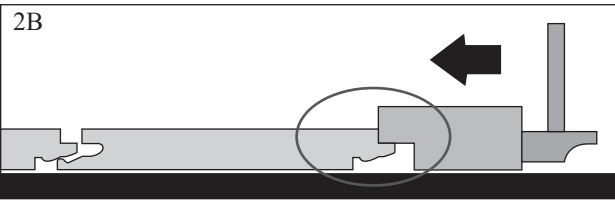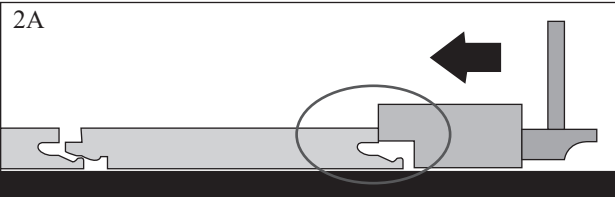

Method B: With Uniclic you can also tap the panels into each other without lining. For this method you must use the special Uniclic tapping block. The planks should not be joined with a single tap. To avoid damaging the panels you must tap them together gradually. See diagram 2A - 2B.

Tools for installing the floor

For the best result, it is essential that you follow the installation instructions exactly. Besides the regular tools for installing floors (i.e. hammer, saw, pencil, measure) you will also need the following accessories:

- installation kit (crowbar, spacers (1-8 mm / 0,039" -0,315") and Uniclic-adapted tapping block)
- underlayment system
- maintenance products


Of course we also need to saw the panels. To obtain a clean cut, the pattern side should face down when you use a jigsaw, sabre saw or circular handsaw and up when you use a handsaw or a crosscut saw.

9 focus points




- Thanks to the Uniclic-system, the floor floats and is installed without glue. You can walk on the floor during and immediately after installation.
- With Uniclic panels you can choose where you want to begin. Think about what will be the easiest way to install the floor. We will demonstrate the installation for right-handed people, from left to right. You can work in the other direction if you want.
- Make sure the panels are mixed sufficiently when you install them, so that you do not end up with too many identical, light or dark panels next to each other.
- Check all panels in daylight before and during installation. Defective panels must never be used.
- The floor should preferably be installed parallel to how the light enters the room. The ideal conditions are 14-20°C (59-68°F) at a relative humidity of 50-60%.
- Let the planks acclimatize for 48 hours in the unopened packaging at the normal room temperature, in the middle of the room where the floor is to be installed.
- Room humidity can vary according to the season, so it is vital that the floor is able to expand and contract. For this reason, make sure you leave an expansion joint of minimum 8 to 10 mm (5/16" to 3/8") on all sides of the floor, around pipes, thresholds and under doors.
- Large rooms must have expansion joints every 13 m (40 feet) width-wise to the panels and every 13 m (40 feet) length-wise. It is recommended to provide an expansion joint between different rooms (e.g. under the door). Expansion joints can be finished by means of a molding that is attached to the subfloor.
- Ensure that the end joints of the panels in two successive rows are never in line. Always ensure that the joints are staggered by at least 15 cm / 6 inches.


Installing the floor

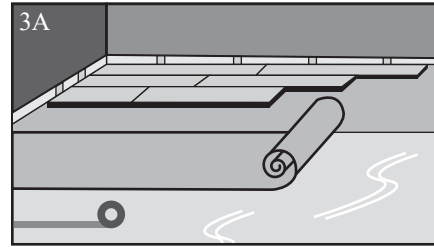


First install the underlayment, per width and gradually as you progress. If the underlayment is pre-mounted on the panels, then you can skip this step. **See diagram 3A.**

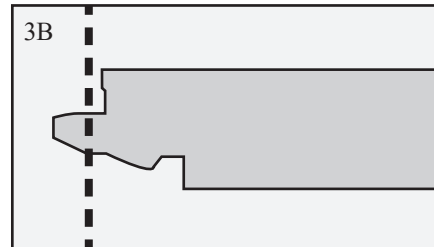


Begin the first row with a whole plank. First saw off the tongue on both the long and the short sides. **See diagram 3B.**

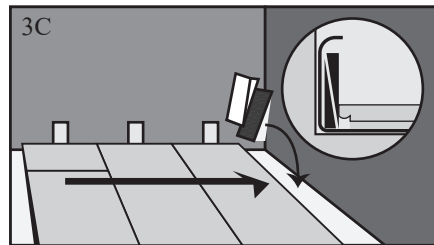


Put the plank with sawn off sides against the walls. Put the spacers from the installation kit between the planks and the wall. This will ensure that your expansion joint is wide enough: 8 to 10 mm (5/16" to 3/8"). **See diagram 3B.**

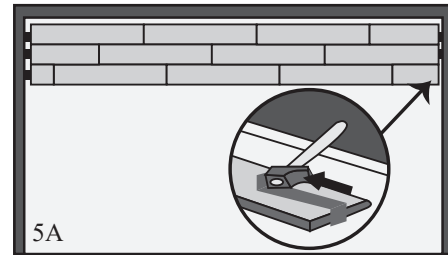


In places where it is too difficult to install the Uniclic planks with the tapping block (e.g. against the wall), you can tap them together using the crowbar and a hammer. **See diagrams 5A - 5B - 5C.**

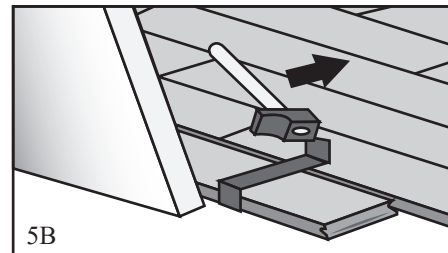



There must also be an 8 to 10 mm (5/16" to 3/8") expansion joint between the last row and the wall. Keep this in mind when sawing the last row of panels.

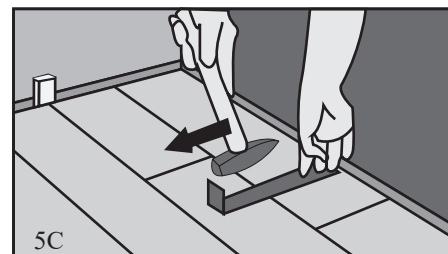


Pipes

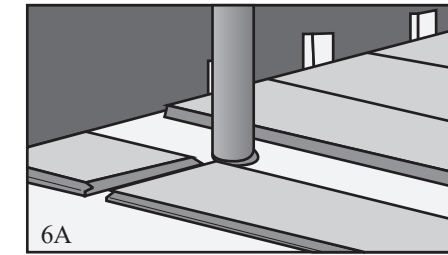


In rows where there is a pipe, make sure the pipe falls exactly in line with the short side of two panels. Take a drill bit with the same diameter as the pipe plus 20 mm (3/4") for the expansion. Click the panels together on the short side and drill a hole centered on the joint between the two panels. Now you can install the panels in the floor. **See diagrams 6A - 6B - 6C.**

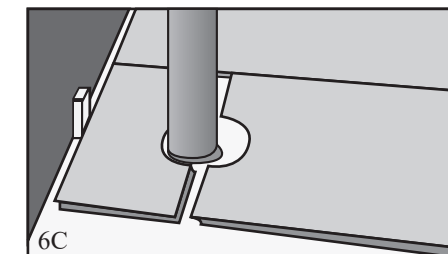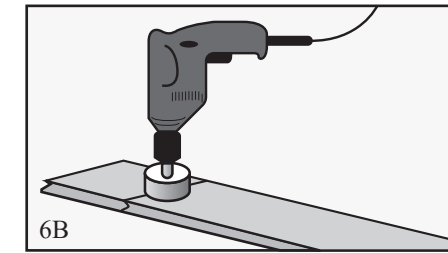

Under door frames

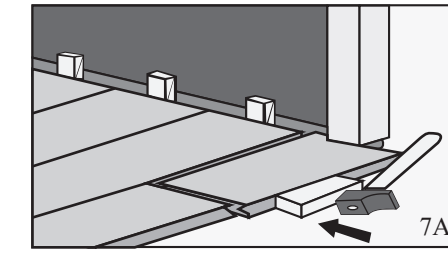


When sawing the panels ensure that the expansion joint under the door is at least 10 mm (3/8"). If you cannot line the panel, use an adapted tapping block or crowbar and hammer to tap the panels together with the planks that are flat on the floor. **See diagrams 7A - 7B.**

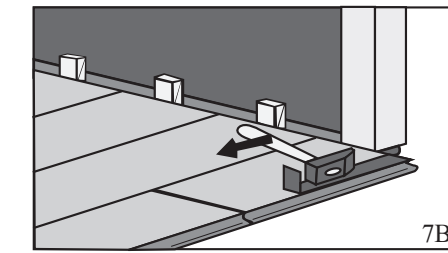

Finishing

- Remove all spacers.
- Install the molding on the plastic membrane that runs up the wall from under the floor. Never attach the molding to the floor. This method allows the floor to expand and contract under the molding.
- For a perfect finish around pipes, use rosettes or caulking.
- In places where profiles or skirting cannot be placed, fill the expansion gaps with caulking. **See diagram 8A.**

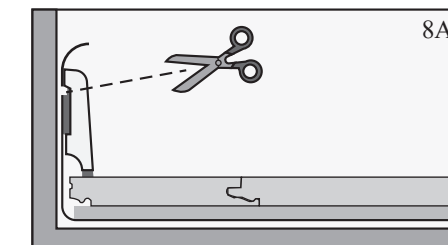

Enjoy your floor.

NOTES

Handwriting practice lines consisting of 20 horizontal dashed lines.



www.argiltiles.com



LINK LOCK

Revolution in tiles

ARGIL SPC Flooring Co.

{O}: 8-A, National highway, Morbi - 363642 | Gujarat | India.

{M}: info@argiltiles.com | spcflooring@argiltiles.com

{C}: 02822-240628 / 29

{M}: +91 982 521 1465

PLEASE DOWNLOAD OUR OFFICIAL
APPLICATION FOR ANDROID & IOS



ANDROID



IOS